



OVERVIEW SPIRAL PIVOT OPERABLE OR END FIXED 135MM HI-SPAN BALUSTRADE LOUVRES



135MM HI-SPAN LOUVRES AS BALUSTRADE

135MM HI-SPAN
BALUSTRADE LOUVRES

Operable Balustrades

The 135mm Hi-Span louvre has been designed to provide an operable Spiral pivoting louvre suitable to be used as a balustrade system in NZ.

The louvre is to be used as an infill panel only and does not include structural horizontal or vertical balustrade supports. Structural balustrade support by others.

Balustrade - Technical details

NZ AND AUSTRALIAN
COMPLIANCE REQUIREMENTS


This is a general guideline outlining some key requirements as at the time of printing. Please confirm all details with your local regulatory authority prior to balustrade installation.

1. A barrier is required when someone could fall vertically 1m or more.
2. Balustrade or barrier must be 1m high and of adequate strength to cope with people pressing against it.
3. Ensure nowhere on the balustrade a child can get a foot hold between 150mm & 750mm above the deck surface to climb over the balustrade or fall through.
4. In NZ the maximum opening between balustrade verticals is 100mm.
5. In Australia the maximum opening between balustrade verticals is 125mm.

SPIRAL PIVOT OPERABLE 135MM HI-SPAN
BALUSTRADE LOUVRE CAN ALSO BE END FIXED

135MM HI-SPAN BALUSTRADE LOUVRES

Operable Balustrades

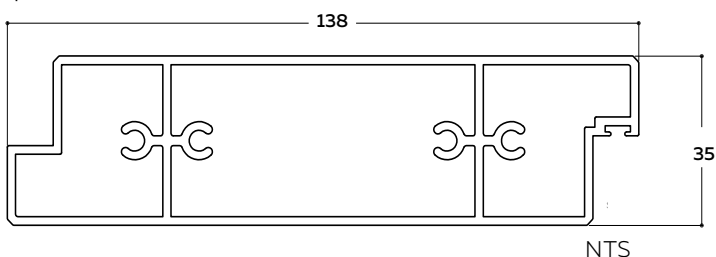

NTS

REFER TECHNICAL DETAILS PAGE 10.2.38




135MM HI-SPAN BALUSTRADE LOUVRE

SUN LOUVRES SPIRAL PIVOT



BLADE SPECIFICATIONS 135MM HI-SPAN BALUSTRADE LOUVRES (NOTE ACTUAL BLADE WIDTH 138MM)

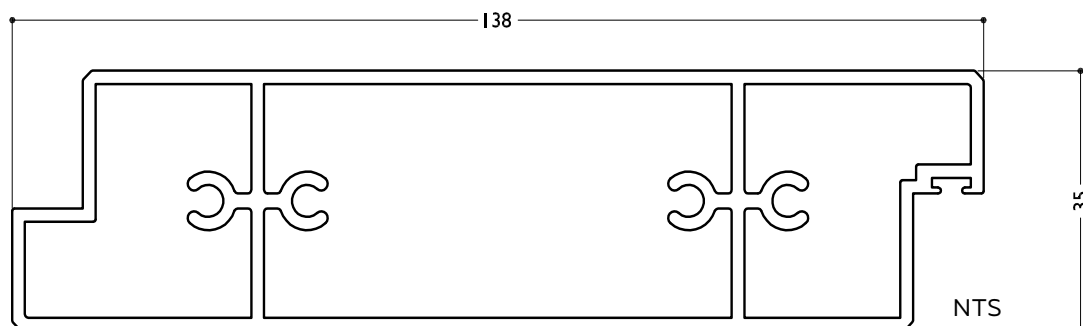

BLADE SPECIFICATIONS			
Blade cover - opening system	130 mm	Weight per linear metre - opening system	2.16 kg/lm
Weight per square metre - opening system	16.4 kg/sqm	Actual blade width	138 mm
Blade centres - opening system	130 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Adjustable & Fixed, Horizontal & Vertical	4850	4400	4400	4100	3700	3500
Adjustable & Fixed - Balustrade	3000	3000	3000	3000	3000	3000

INSTALLATION OPTIONS



SPIRAL PIVOT SYSTEM: CALCULATE OPTIMUM FRAME OPENING SIZES

Width: Check engineering limits

Height: Calculation example showing 17 blades

STEP 1

16 blades x 130	2080
1 blade at 138	138
17 blades	=2218

STEP 2

Blade cover	2218
+ top and bottom closing angles allow for 5mm + 5mm	10
Total exact opening height =	2228*

*This is inside measure - not outer frame size

TECHNICAL DETAILS BALUSTRADES NZ AND AUSTRALIAN COMPLIANCE REQUIREMENTS


This is a general guideline outlining some key requirements as at the time of printing. Please confirm all details with your local regulatory authority prior to balustrade installation.

1. A barrier is required when someone could fall vertically 1m or more.
2. Balustrade or barrier must be 1m high and of adequate strength to cope with people pressing against it.
3. Ensure nowhere on the balustrade a child can get a foot hold between 150mm & 750mm above the deck surface to climb over the balustrade or fall through.
4. In NZ the maximum opening between balustrade verticals is 100mm.
5. In Australia the maximum opening between balustrade verticals is 125mm.




NEW ZEALAND COMPLIANT OPERABLE OR FIXED BALUSTRADE SYSTEM

SECTION - MOTORISED 135MM HI-SPAN LOUVRE SPIRAL PIVOT ON ELAM STREET STRUCTURAL FRAME

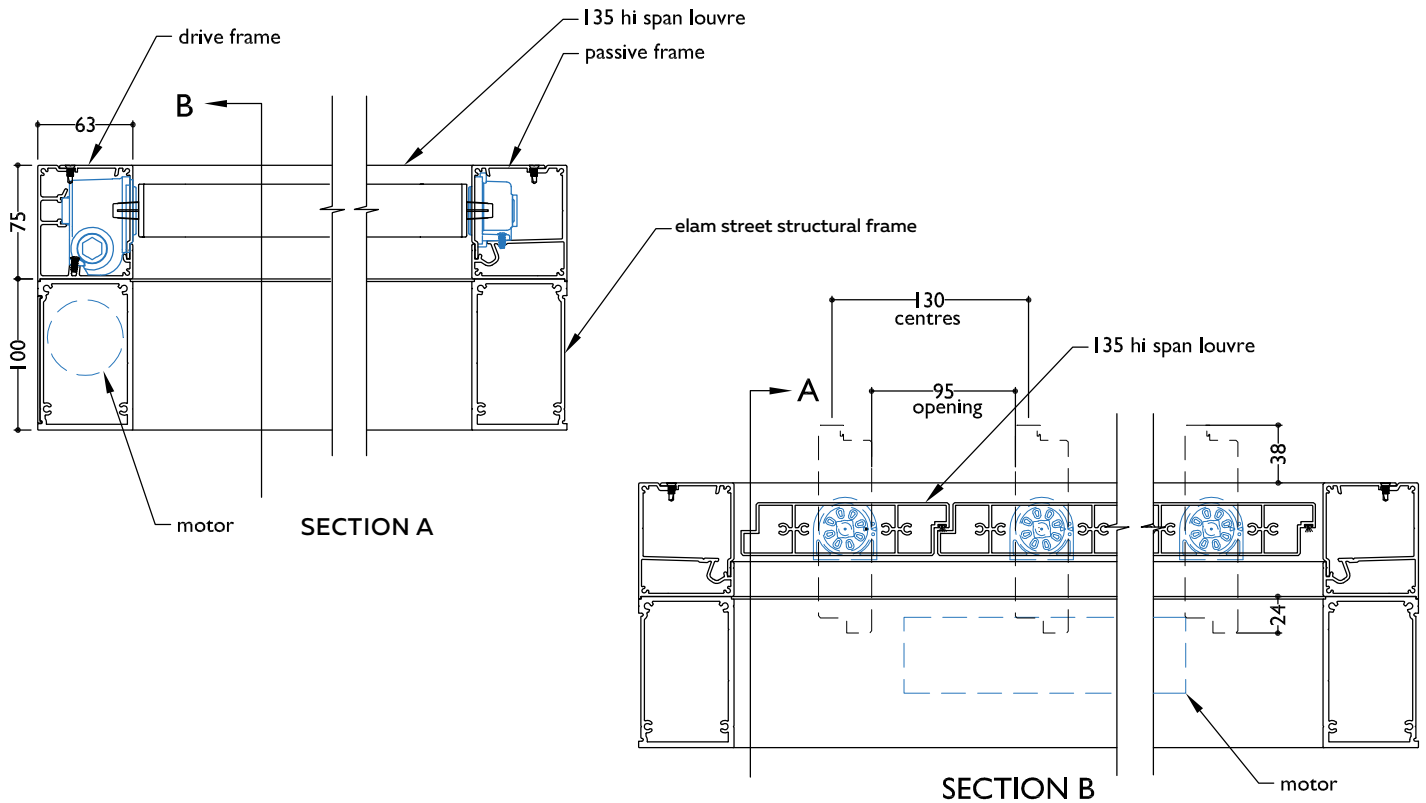

SECTION - MANUALLY OPERABLE 135 HI-SPAN LOUVRE SPIRAL PIVOT INSERT PANEL FOUR SIDED FRAME


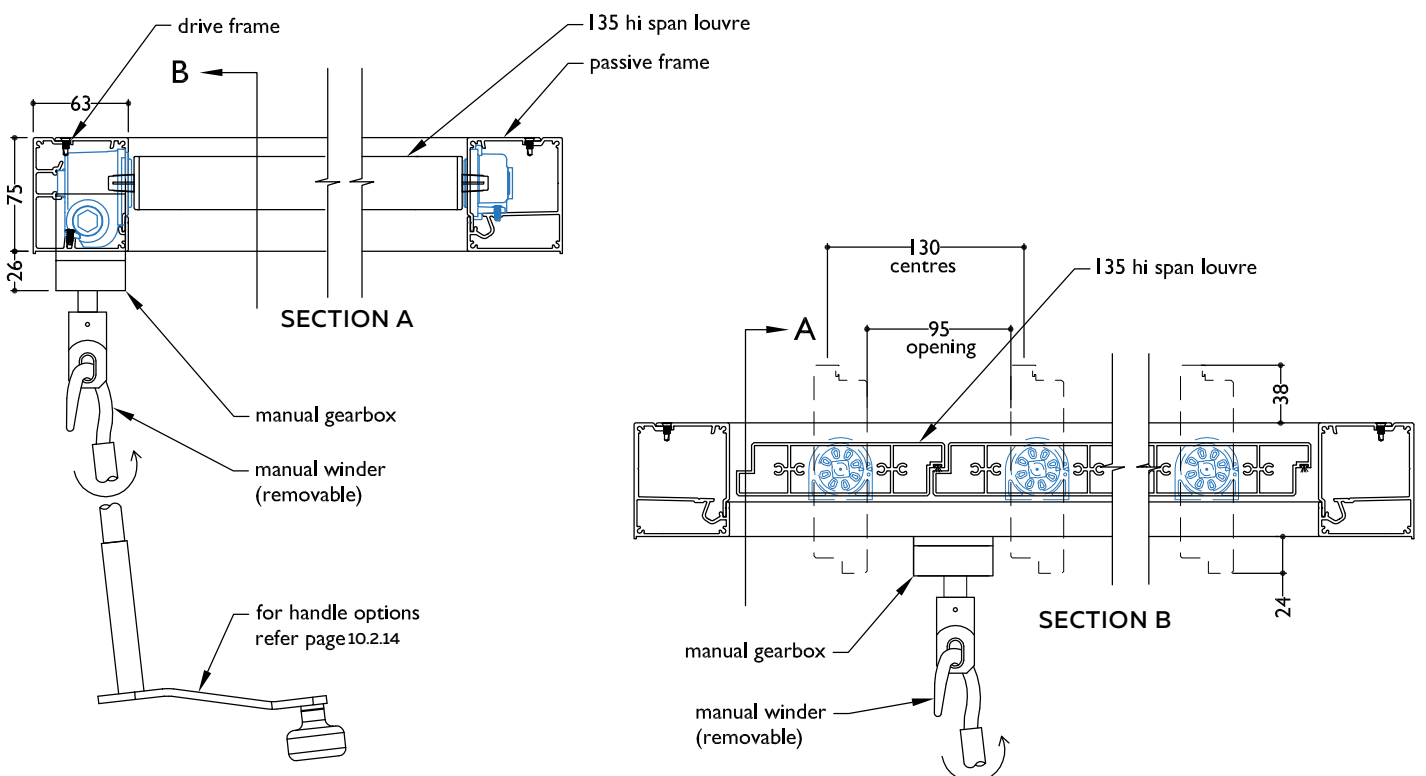


TYPICAL DETAIL: SPIRAL PIVOT SYSTEM
135MM HI-SPAN BALUSTRADE - NEW ZEALAND COMPLIANT




135 Hi-Span is compliant with the relevant standards as an infill for residential balustrade in New Zealand.


Refer Section 13, Table 3 for maximum spans

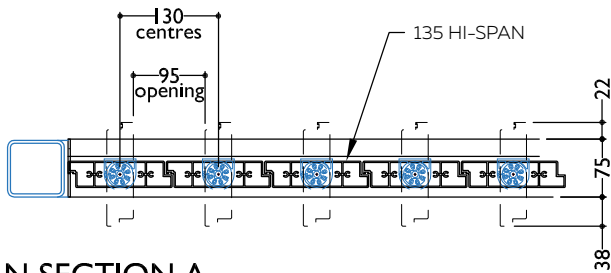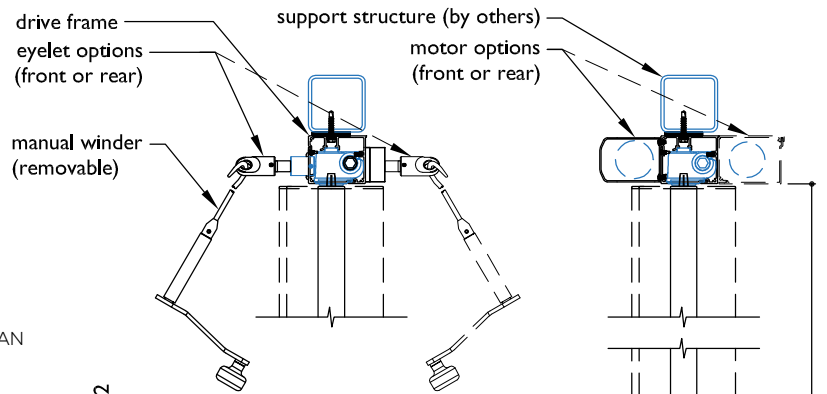

PLAN SECTION A

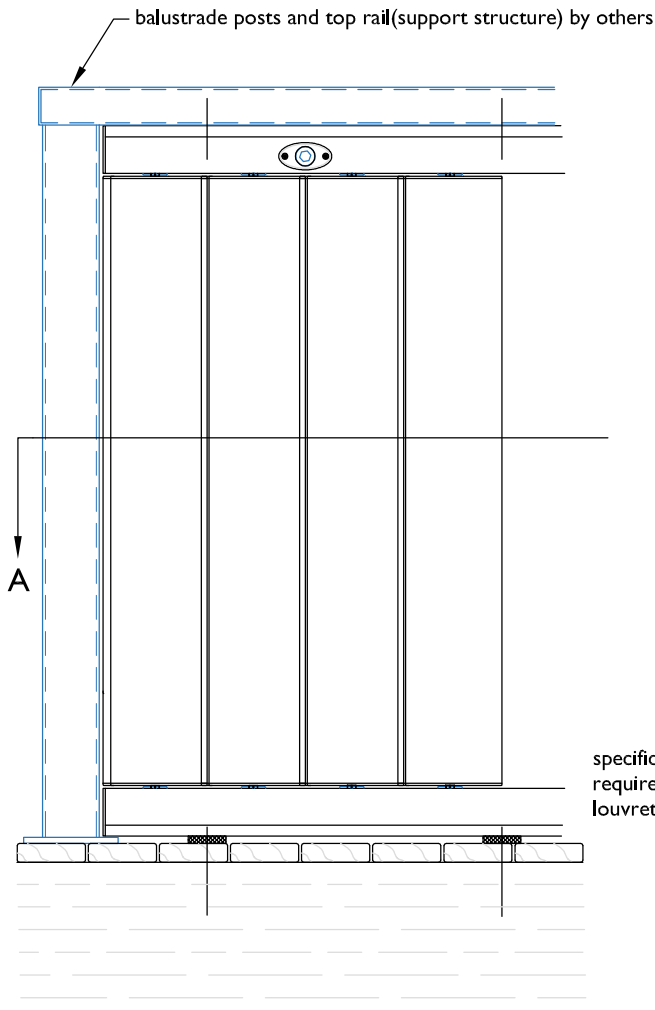

ELEVATION: 135 HI-SPAN AS STANDARD BALUSTRADE INFILL

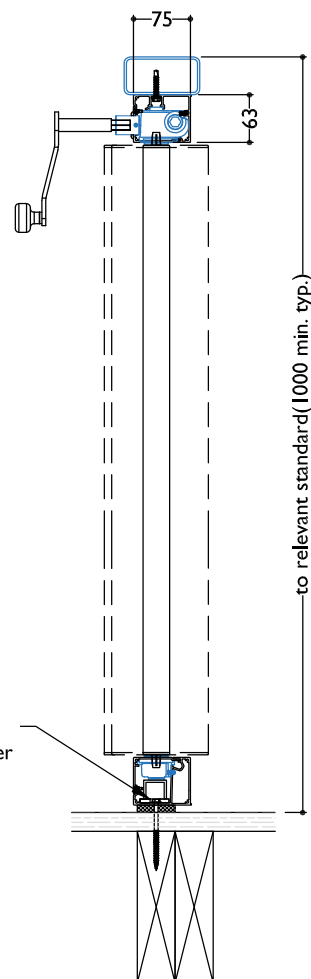

SECTION: 135 HI-SPAN STANDARD HEIGHT

SECTION: 135 HI-SPAN STANDARD HEIGHT