



WIRING DETAIL : MULTIPLE SOMFY RTS MOTORS WITH LOUVRETEC/TELECO RAIN SENSOR ADAPTOR & SOMFY REMOTE (OPENING ROOF, PANEL & OUTDOOR BLIND)

OPENING ROOF

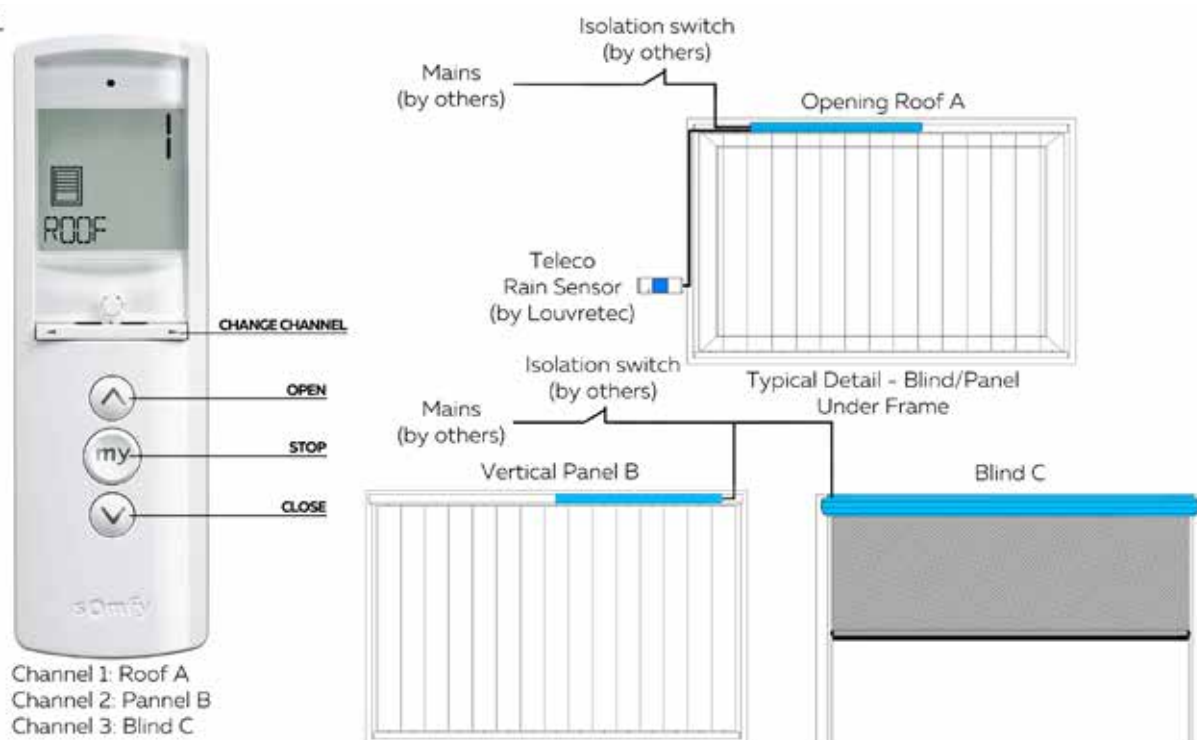

RAIN SENSOR CONTROLS ALL ROOFS

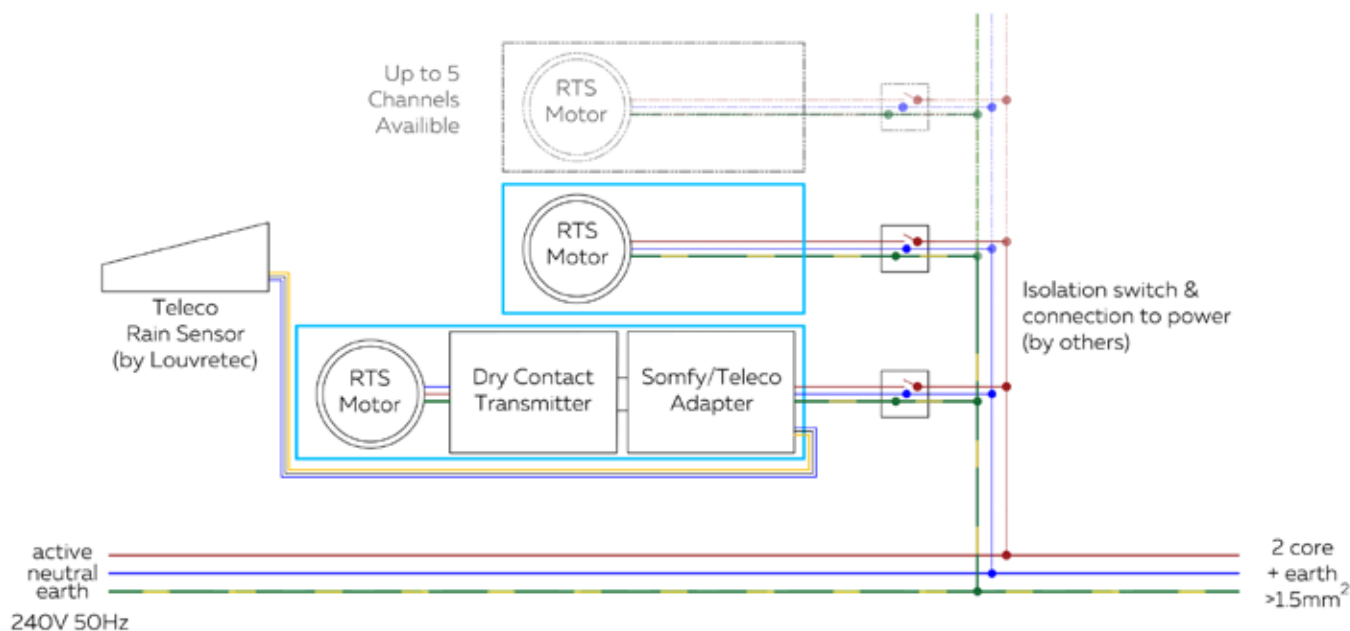

Cable protection (physical & UV) by others



Blue = Neutral
Brown = Live
Yellow/Green = Earth

| | |
|---------------------|--|
| Cable Required | 3 core double insulated heavy duty flex 3 x 1.5mm |
| Voltage | 230–240V/50Hz |
| Rated Current | 0.8 Amps per motor |
| Current Consumption | 170 Watts per motor |