

WIRING DETAIL: MULTIPLE SOMFY WT MOTORS WITH RAIN SENSOR & CONTROLLED BY BUILDING MANAGEMENT SYSTEM (BMS)



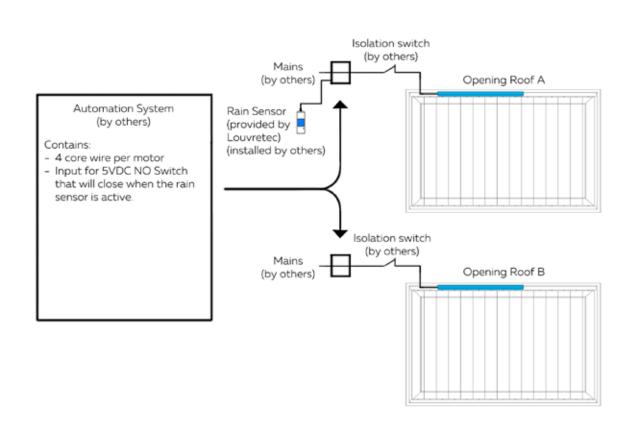

Cable protection (physical & UV) by others

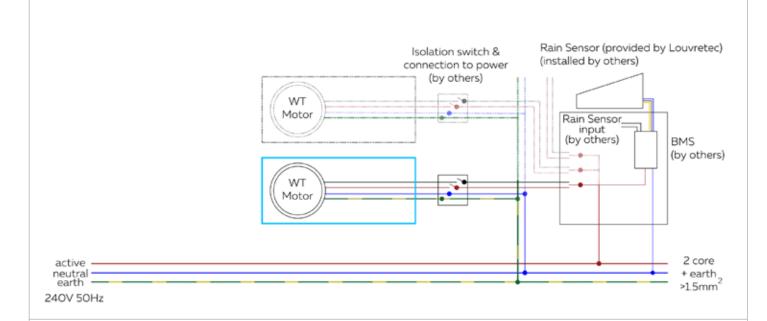

Cable Required	4 core double insulated heavy duty flex $4 \times 1.5 \text{mm}$
Voltage	230-240V/50Hz
Rated Current	0.8 Amps per motor
Current Comsumption	170 Watts per motor

SCALE:

DATE MODIFIED: 01/10/2024 FILE: **ELECTRICAL WIRING DIAGRAMS 14.21**

www.louvretec.co.nz www.louvretec.com.au

©Louvretec 2025 - All Rights Reserved. Technical specifications subject to change without notice.