

WIRING DETAIL : SINGLE ON/OFF BROMIC HEATER WITH SOMFY REMOTE



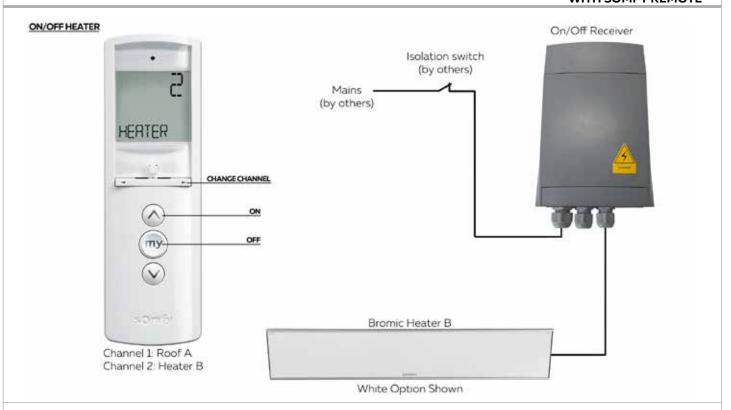

Cable protection (physical & UV) by others

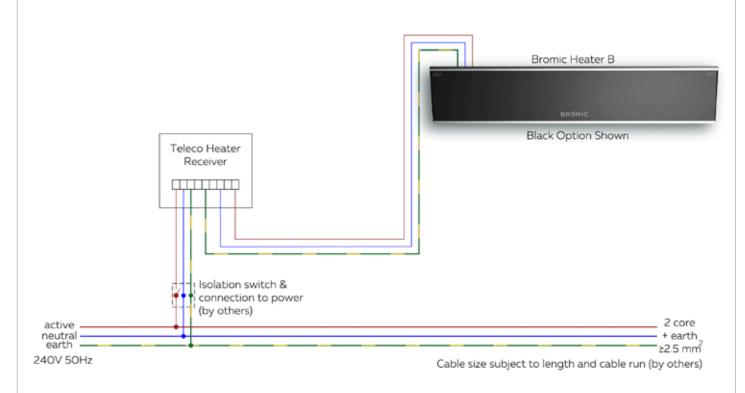

Cable Required	3 core double insulated heavy duty flex 3 x \geq 2.5mm
Voltage	230-240V/50Hz
Rated Current	10 - 14.2 Amps
Current Comsumption	2.4 - 3.4KW

SCALE: DATE MODIFIED: 01/10/2024 FILE: **ELECTRICAL WIRING DIAGRAMS 14.35** www.louvretec.com.au