

THE LOUVRETEC RANGE OF RETRACT ROOFS

Somfy powered new ‘Slimline’ Retractable Roofs & Spiral Pivot Compatible Roofs











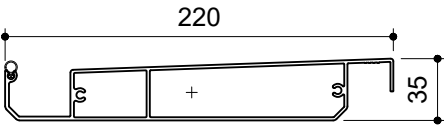

Spiral Pivot Opening Roofs pivot louvre roof blades open & closed

louvretec retract

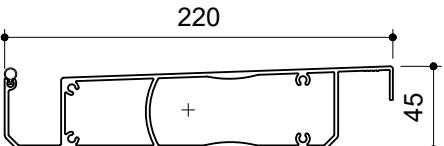

Retract Roofs pivot louvre roof blades open & closed & Retract back

TYPE/COLLECTION	LOUVRE BLADE STYLE	MAXIMUM SPANS
SLIMLINE RETRACT ROOFS	 220/35 SLIMLINE RETRACT ROOF (ALSO SPIRAL PIVOT COMPATIBLE)	<div><div>3500MM*</div> <div>4300MM*</div> *3M ROOF HEIGHT</div> <div>louvretec retract  </div>
	 220/45 ALPINE RETRACT ROOF (ALSO SPIRAL PIVOT COMPATIBLE)	<div><div>5000MM*</div> <div>5000MM*</div> *3M ROOF HEIGHT</div> <div>louvretec retract  </div>


RETRACT ROOFS CONFIGURATION OPTIONS



- OPTION 1**
THREE SIDED FRAME - BLADES STACK TO REAR
- No front beam, blades stack to rear
 - Can be even or uneven number of blades



- OPTION 2**
FOUR SIDED FRAME - BLADES STACK TO ONE END
- Blades can stack to either one end
 - Can be even or uneven number of blades

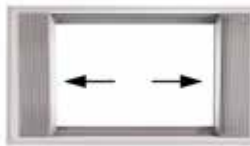

- OPTION 3**
FOUR SIDED FRAME - BLADES STACK AT EACH END
- Blades split stack from centre to each end
 - Must be even number of blades



- OPTION 4**
FOUR SIDED FRAME - DOUBLE RETRACT (MID-BEAM MAY BE REQUIRED)
- Two Retracts meeting at mid-beam
 - No mid-beam gutter required, blades close onto mid-beam flashing
 - Blades stack from centre to each end
 - Can be even or uneven number of blades
 - Maximum length; up to 13.734mm