
TYPICAL DETAIL : 220/45 ALPINE RETRACT ROOF WITHIN LOUVRETEC STRUCTURAL FRAME

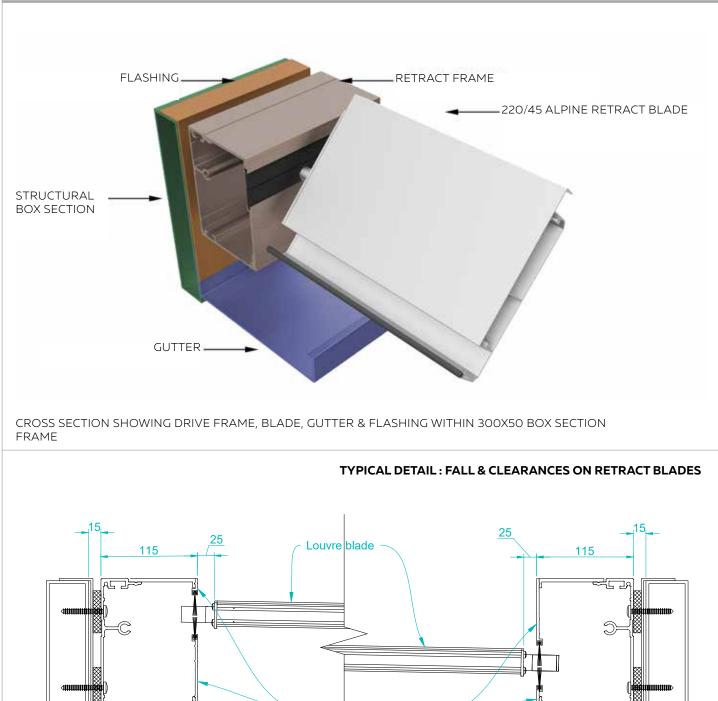

RETRACT ROOFS ARE TYPICALLY INSTALLED LEVEL

പ്പ

section

Box

DRIVE SIDE

HIGH SIDE OF BLADE

10 Packer

5mm flashing

FALL ACROSS THE BLADES IS ACHIEVED WITH THE BLADES SET HIGHER ON THE DRIVE SIDE, FALLING 60mm TO THE PASSIVE SIDE.

Removable brush cover

60mm FALL IS COMMON ON ALL RETRACTS IRRESPECTIVE OF BLADE LENGTH.

SCALE: DATE MODIFIED: 01/10/2024 FILE: RETRACT 3.17 www.louvretec.com.au

©Louvretec 2025 - All Rights Reserved. Technical specifications subject to change without notice.

section

Box

ر ر

PASSIVE SIDE

LOW SIDE OF BLADE

10mm packer

5mm flashing