



KISS PIVOT SUN LOUVRES

Gallery	10.1.02
KISS Pivot Louvre Range	10.1.03
KISS Pivot Overview	10.1.04
KISS Pivot 90mm and 150mm louvre	10.1.05
Blade Specifications: 90mm + 150mm	10.1.06-10.1.07
Technical Details 90mm + 150mm	10.1.08
KISS Pivot 95mm Bella Vista + Bella Vista	
Heavy louvres	10.1.09
Blade Specifications: 95mm Bella Vista &	10.1.10-10.1.11
95 Bella Vista Heavy Louvres	
Technical Details 95mm Bella Vista louvres	10.1.12

LouvreTec

Kiss×

©Louvretec 2025 - All Rights Reserved. Technical specifications subject to change without notice.

| 10.1.01



1. 95MM BELLA VISTA LOUVRE 2. 150MM KISS PIVOT LOUVRE, DARK RIVERWOOD 3. 90MM LOUVRE BLADE SHUTTERS 4. 95MM BELLA VISTA HEAVY SHUTTERS

©Louvretec 2025 - All Rights Reserved. Technical specifications subject to change without notice.

SUN LOUVRES SPANS AT A GLANCE

MINIMUM - MAXIMUM BLADE SPANS AT A GLANCE AS DETERMINED BY WIND SPEED. REFER TO SECTION 13 ENGINEERING REPORTS FOR FULL DETAILS ON BLADE SPANS. EXTRA HIGH WIND SPEED 198KM/H 55M/S





THE LOUVRETEC RANGE OF KISS PIVOT SUN LOUVRES

Kiss Pivot System

TYPE/COLLECTION	LOUVRE STYLE	MAXIMUM SPANS
AIRFOIL	90MM MIDI LOUVRE	
LOUVRE BLADES	150MM MIDI LOUVRE	1900MM СТАТИСН 2750MM ССОО
RECTANGULAR	95MM BELLA VISTA	
LOUVRE BLADES	95MM BELLA VISTA HEAVY	1900MM

Proven reliability

KISS Pivot sun louvres feature a clean uncluttered style easily hand-operated by full length snug fitting double drive-arms.





DRIVE SYSTEM: KISS PIVOT

Kiss Pivot Sun Louvres


Choose from two Airfoil and two Rectangular louvre blades.



90MM SLIDING SHUTTERS USING KISS PIVOT DRIVE SYSTEM



KISS PIVOT - 95MM BELLA VISTA RECTANGULAR LOUVRE PANEL



KISS PIVOT LOUVRES IN SLIDING PANEL

Ease of Operation


- The KISS Pivot system is elegant and simple, tried and true and well proven in the market place.
- An easy to operate, well proven Sun Louvre pivot system.
- Operates off double drive-arms that can be locked closed or in various open positions.
- Offers fully adjustable louvres at little more than fixed louvre prices.
- Ideal as a stand-alone panel or used within Sliding, Bifolding and Hinged doors.
- KISS Pivot louvres allow for greater versatility and design options when considering hand adjustable louvres.
- A flush fitting stainless steel Slidelock provides locking points at fully closed, 45°, 90° and 135°
- Each blade has a woolpile closing strip to ensure snug rattle free closing.
- Functional, reliable operable louvre design.




AIRFOIL SUN LOUVRES KISS PIVOT **OVERVIEW** HAND OPERABLE KISS PIVOT LOUVRES Compatible Louvres: 90 Airfoil, 150 Midi

90MM MIDI LOUVRE

Small to medium size

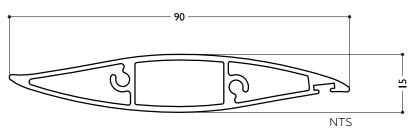



90MM AIRFOIL LOUVRE

The 90mm Midi Louvre is similar to the 'wave' shape of the 150mm blade & is a perfect mix of compact width with good spans. This blade can be hand operated using the KISS Pivot system. The blades can be locked closed or in a number of opening positions. A woolpile closing insert ensures a snug fit when closed.


The 90mm Midi Louvre is well suited fixed within an opening or within sliding, bi-folding or hinged doors.

Also available end and bracket fixed.

REFER TECHNICAL DETAILS PAGE 10.1.06

150MM MIDI LOUVRE

Wave shaped blade

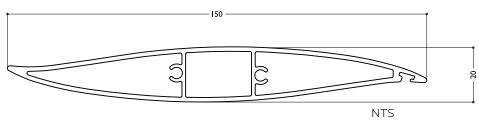

150MM AIRFOIL LOUVRE

The 150mm Midi is the largest of the 'wave' shape group of louvres.


The wider blade spans well and is ideal for closing off decks and verandah spaces. This versatile louvre is available in both Spiral (motorised and hand operable) and KISS (hand adjustable) Pivot systems. KISS Pivot louvres are hand operated and can be locked closed in various opened positions.

A woolpile closing insert ensures a snug fit when closed. This blade is well suited fixed within an opening or within sliding, bifolding or hinged doors. Also available end and bracket fixed.

REFER TECHNICAL DETAILS PAGE 10.1.07



BLADE SPECIFICATIONS 90MM AIRFOIL LOUVRE

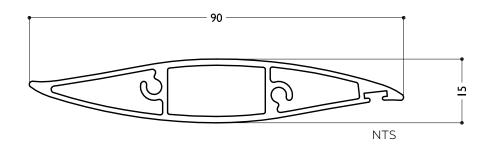

BLADE SPECIFICATIONS			
Blade cover - opening system	80 mm	Weight per linear metre - opening system	0.75 kg/lm
Weight per square metre - opening syster	n 9.38 kg/sqm	Actual blade width	90 mm
Blade centres - opening system	80 mm		


SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Adjustable & Fixed, Horizontal & Vertical	2350	2000	1850	1600	1500	140

INSTALLATION OPTIONS

CALCULATE OPTIMUM FRAME OPENING SIZES FOR KISS PIVOT Width: Check engineering limits



KIS.


STEP 1	
16 blades x 80	1280
1 blade at 90	+90
17 blades	=1370
STEP 2	
Blade cover	1370
+ top and bottom closing	
angles allow for	
16mm + 16mm	32
Total exact opening height=	1402*
*This is inside measure - not oute	r frame size



KISS PIVOT SYSTEM - 90MM MIDI LOUVRE PANEL

00

BLADE SPECIFICATIONS 150MM MIDI LOUVRE

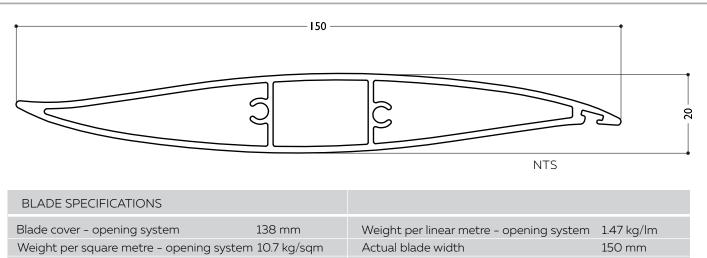

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Adjustable & Fixed, Horizontal & Vertical	2900	2750	2500	2200	2000	1900

INSTALLATION OPTIONS

CALCULATE OPTIMUM FRAME OPENING SIZES FOR KISS PIVOT Width: Check engineering limits



Height: Calculation example showing 17 blades

STEP 1	
16 blades x 138	2208
1 blade at 150	+ 150
17 blades	= 2358

STEP 2	
Blade cover	2358
+ top and bottom closing	
angles allow for	
21mm + 21mm	+ 42
Total exact opening height =	=2400*


*This is inside measure - not outer frame size



KISS PIVOT SYSTEM - 150MM MIDI LOUVRE PANEL

TYPICAL DETAIL: KISS PIVOT 90MM AIRFOIL & 150MM MIDI LOUVRES

KISS PIVOT CLEARANCES

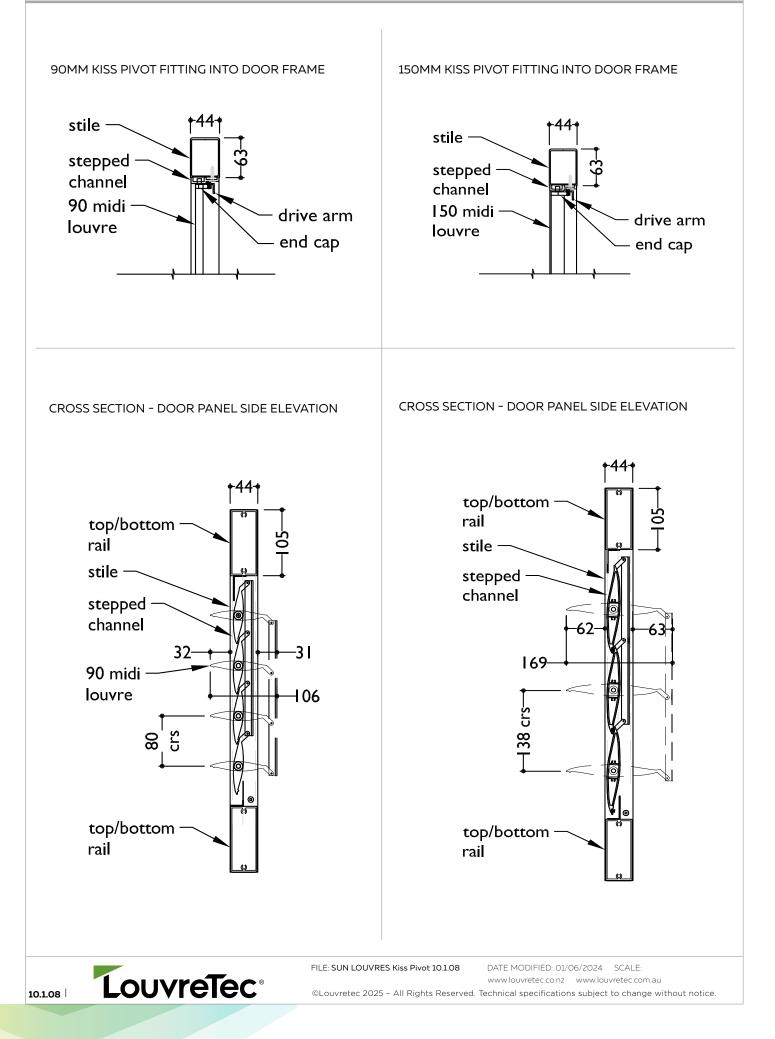



HAND OPERABLE KISS PIVOT LOUVRES

Compatible Louvres: 95 Bella Vista, 95 Bella Vista Heavy

95MM BELLA VISTA

Rectangular option for infills





95MM BELLA VISTA

The Bella Vista family of two louvre blades is available in standard or heavy versions and offers a rectangular option to the 90mm KISS Midi Louvre.

Available as a hand operated KISS Pivot system and offering the advantages of fully adjustable louvres at little more than fixed louvre prices.


The rectangular blades close onto a woolpile strip and sit flush when closed giving a pleasing contrast to traditional shaped louvres. Particularly well suited to hinged or sliding shutters.

Also available end fixed.

REFER TECHNICAL DETAILS PAGE 10.1.10

95MM BELLA VISTA HEAVY

Ideal for exposed locations

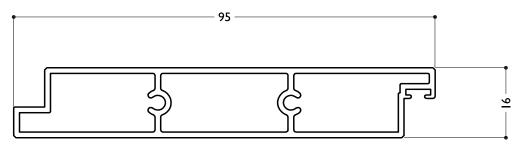



95MM BELLA VISTA HEAVY

The Bella Vista family of two louvre blades is available in standard or heavy versions and offers a rectangular option to the 90mm KISS Midi Louvre.

Bella Vista Heavy is a hand operated KISS Pivot system and shares all the characteristics of the 95mm Bella Vista.


Designed to incorporate increased spanning capability this blade out performs all other louvres in its class and is particularly well suited to exposed locations.

Also available end fixed.

REFER TECHNICAL DETAILS PAGE 10.1.11



BLADE SPECIFICATIONS 95MM BELLA VISTA

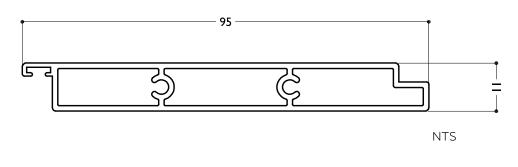

BLADE SPECIFICATIONS			
Blade cover - opening system	90 mm	Weight per linear metre - opening system	0.68 kg/lm
Weight per square metre - opening syster	n 7.55 kg/sqm	Actual blade width	95 mm
Blade centres - opening system	90 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Adjustable & Fixed, Horizontal & Vertical	2550	2100	1900	1700	1550	1450

INSTALLATION OPTIONS

CALCULATE OPTIMUM FRAME OPENING SIZES FOR KISS PIVOT Width: Check engineering limits

Height: Calculation example showing 17 blades

STEP 1	
16 blades x 90	2208
1 blade at 95	+ 95
17 blades	= 1535
STEP 2	
Blade cover	1535
+ top and bottom closing	
angles allow for	
16mm + 16mm	+ 32
Total exact opening height	= 1567*


*This is inside measure - not outer frame size



95MM BELLA VISTA KISS PIVOT PANEL



BLADE SPECIFICATIONS 95MM BELLA VISTA HEAVY

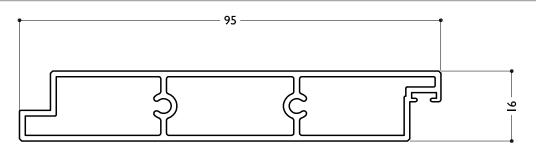

NTS

BLADE SPECIFICATIONS			
Blade cover - opening system	90 mm	Weight per linear metre - opening system	0.91 kg/lm
Weight per square metre - opening system	n 10.1 kg/sqm	Actual blade width	95 mm
Blade centres - opening system	90 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Adjustable & Fixed, Horizontal & Vertical	3000	2800	2550	2250	2050	1900

INSTALLATION OPTIONS

CALCULATE OPTIMUM FRAME OPENING SIZES FOR KISS PIVOT Width: Check engineering limits



Height: Calculation example showing 17 blades

STEP 1	
16 blades x 138	1440
1 blade at 95	+ 95
17 blades	= 1535
STEP 2	

JILF Z					
Blade cover	1535				
+ top and bottom closing					
angles allow for					
16mm + 16mm	+ 32				
Total exact opening height = 1567*					


*This is inside measure - not outer frame size




95MM BELLA VISTA HEAVY KISS PIVOT PANEL


TYPICAL DETAIL : KISS PIVOT 95MM BELLA VISTA & 95MM BELLA VISTA HEAVY






CROSS SECTION - DOOR PANEL SIDE ELEVATION BELLA VISTA KISS PIVOT FITTING WITHIN AN OPENING






CROSS SECTION - SIDE ELEVATION 95 BELLA VISTA HEAVY KISS PIVOT IN DOOR PANEL



LouvreTec

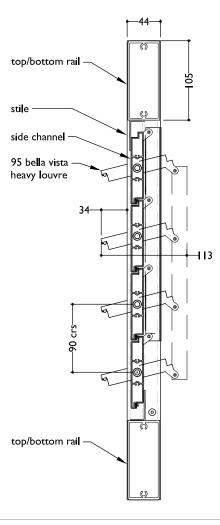

FILE: SUN LOUVRES Kiss Pivot 10.1.12

DATE MODIFIED: 01/06/2024 SCALE: www.louvretec.com.au



